



TECHNICAL DATA:

Easy accessible device, according to standard EN 1176-1:2017


Device dimensions: 3,74 x 3,89m Device height: 0,55m 7,25 x 6,89m Minimum space: Falling area: 35,28m² Critical fall height: 0,90m Foundations depth: -0,60m

The device according to EN 1176-1:2012 Playground equipment and surfacing – Part 1: General safety requirements and test methods.

Safety surfaces:

- turf/topsoil, sand, gravel, bark, synthetic surface
 minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Top view with falling area

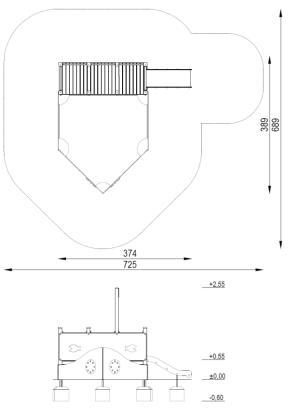

COMPONENTS: MATERIALS: Triple tower without roof, platform 0,55m - 1 pc. glued laminated pine timber, Construction poles: with a cross-section of 90x90mm, Slide 0,55m -1 pc. rounded at the edges, painted in Drawingboard -1 pc. brown Bow's sandpit -1 pc. Anchors: galvanized steel Mast with flag -1 pc. Flat decorative elements: HDPE sheets, 15mm thick Platforms, gangways: impregnated pinewood boards, with machined anti-skid surface, 35mm thick Steel elements: galvanized steel, powder coated Chains: galvanized steel stainlessteel, 1,5 mm thick Surface of slide: Drawing board: waterproof shuttering plywood painted with blackboard paint Caps: Plastic

Foundations:

concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificatebeholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reservesallrights to protect copyright under the Act of February 4, 1994 on Copyright and RelatedRights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.